

US009893422B2

# (12) United States Patent Chou

# (10) Patent No.: US 9,893,422 B2

#### (45) **Date of Patent:** Feb. 13, 2018

# (54) ANTENNA WITH THE EIGHTH OF THE WAVELENGTH

- (71) Applicant: WISTRON CORP., New Taipei (TW)
- (72) Inventor: Chen-Yu Chou, New Taipei (TW)
- (73) Assignee: WISTRON CORP., New Taipei (TW)
- (\*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35

U.S.C. 154(b) by 104 days.

- (21) Appl. No.: 14/217,492
- (22) Filed: Mar. 18, 2014
- (65) Prior Publication Data
  US 2015/0097750 A1 Apr. 9, 2015

### (30) Foreign Application Priority Data

Oct. 9, 2013 (TW) ...... 102136603 A

(51)	Int. Cl.	
	H01Q 9/04	(2006.01)
	H01Q 5/371	(2015.01)
	H01Q 1/22	(2006.01)
	H01Q 1/48	(2006.01)
	H01Q 9/42	(2006.01)

(52) U.S. CI. CPC ...... *H01Q 5/371* (2015.01); *H01Q 1/22* (2013.01); *H01Q 1/48* (2013.01); *H01Q 9/42* 

#### (56) References Cited

#### U.S. PATENT DOCUMENTS

5,191,352 A *	3/1993	Branson H01Q 1/362
		343/850
6,603,432 B2*	8/2003	Hill H01Q 1/243
		343/700 MS
7,764,236 B2*	7/2010	Hill H01Q 1/243
		343/702

(Continued)

#### FOREIGN PATENT DOCUMENTS

CN	1394370	A	1/2003
TW	I396330	B1	5/2013


#### OTHER PUBLICATIONS

The office action of the corresponding Chinese application dated Oct. 31, 2016 and its partial English translation.

Primary Examiner — Dameon E Levi Assistant Examiner — Ab Salam Alkassim, Jr. (74) Attorney, Agent, or Firm — CKC & Partners Co., Ltd.

#### (57) ABSTRACT

An antenna includes a grounding conductor, a feed conductor, a resonant conductor, and a radioactive conductor. The feed conductor is disposed apart from the grounding conductor. The resonant conductor having a resonant width is disposed along the grounding conductor and disposed apart from the grounding conductor by a resonant-ground distance. The resonant conductor connects to the feed conductor. The radioactive conductor has a radioactive width. One end of the radioactive conductor connects to one end of the resonant conductor with the feed conductor, and another end of the radioactive conductor is disposed apart from the grounding conductor. The radioactive conductor is disposed along the resonant conductor and disposed apart from the resonant conductor by a resonant-radioactive distance. The resonant conductor is positioned between the radioactive conductor and the grounding conductor. A proportion of the resonant-ground distance, the resonant width, the resonant-(Continued)





### (12) United States Patent Liou et al.

(45) Date of Patent:

(54)	ANTENNA STRUCTURE AND WIRELESS
	COMMUNICATION DEVICE USING THE
	SAME

(71) Applicant: Chiun Mai Communication Systems, Inc., New Taipei (TW)

Inventors: Geng-Hong Liou, New Taipei (TW); (72)Yen-Hui Lin, New Taipei (TW)

(73)Assignee: Chiun Mai Communication Systems, Inc., New Taipei (TW)

Subject to any disclaimer, the term of this Notice:

patent is extended or adjusted under 35 U.S.C. 154(b) by 461 days.

(21) Appl. No.: 14/523,379

(22)Filed: Oct. 24, 2014

(65)**Prior Publication Data** 

> US 2015/0180131 A1 Jun. 25, 2015

(30)Foreign Application Priority Data

Dec. 23, 2013 (CN) ...... 2013 1 0715661

(51) Int. Cl. H01Q 9/04 (2006.01)

(52) U.S. Cl. CPC ............ H01Q 9/0414 (2013.01); H01Q 9/045

(58) Field of Classification Search CPC ...... H01Q 9/0414; H01Q 9/045

343/700 MS See application file for complete search history.

US 9,893,425 B2

Feb. 13, 2018

#### References Cited (56)

(10) Patent No.:

#### U.S. PATENT DOCUMENTS

2011/0260925 A1*	10/2011	Chirila H01Q 1/38
		343/700 MS
2012/0105291 A1	5/2012	Tu
2012/0154222 A1*	6/2012	Oh H01Q 1/243
		343/702
2012/0169568 A1*	7/2012	Oh H01Q 1/243
		343/893

#### FOREIGN PATENT DOCUMENTS

TWM395272 U1 12/2010


\* cited by examiner

Primary Examiner - Dameon E Levi Assistant Examiner - David Lotter (74) Attorney, Agent, or Firm — ScienBiziP, P.C.

#### ABSTRACT

An antenna structure includes a baseplate, a first radiator plate, a second radiator plate, and a third radiator plate. The baseplate has a first surface and a second surface opposite to the first surface. The first radiator plate is disposed on the first surface. The second radiator plate is disposed on the first surface. The third radiator plate is disposed on the second surface. A slot is defined between the first radiator plate and the second radiator plate, and the second radiator plate is coupled to the first radiator plate and the third radiator plate.

### 15 Claims, 5 Drawing Sheets

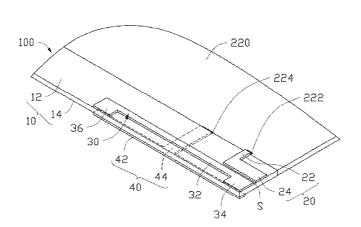



US009893428B2

# (12) United States Patent Elad et al.

# (10) Patent No.: US 9,893,428 B2 (45) Date of Patent: \*Feb. 13, 2018

# (54) DIRECT TRANSITION FROM A WAVEGUIDE TO A BURIED CHIP

(71) Applicant: SEMICONDUCTOR COMPONENTS INDUSTRIES, LLC, Phoenix, AZ

(US)

(72) Inventors: **Danny Elad**, Moshav Liman (IL); **Noam Kaminski**, Kiryat Tivon (IL);

Ofer Markish, Nesher (IL)

(73) Assignee: Semiconductor Components Industries, LLC, Phoenix, AZ (US)

(\*) Notice: Subject to any disclaimer, the term of this

patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

---

This patent is subject to a terminal disclaimer.

(21) Appl. No.: 15/606,756

(22) Filed: May 26, 2017

(65) Prior Publication Data

US 2017/0271775 A1 Sep. 21, 2017

#### Related U.S. Application Data

- (63) Continuation of application No. 14/964,689, filed on Dec. 10, 2015, now Pat. No. 9,692,135.
- (51) Int. Cl. H01Q 13/00 (2006.01)H01P 3/12 (2006.01) H01P 3/16 (2006.01)H01P 5/08 (2006.01)H01P 5/107 (2006.01)H01Q 1/50 (2006.01)H01Q 15/14 (2006.01)H01Q 19/10 (2006.01)(Continued)

#### 

(2013.01); **H01Q** 13/02 (2013.01); **H01Q** 13/0283 (2013.01); **H01Q** 15/141 (2013.01); **H01Q** 19/10 (2013.01); **H01Q** 19/30 (2013.01)

(58) Field of Classification Search

CPC ............ H01Q 1/50; H01Q 19/10; H01Q 19/30; H01P 3/12; H01P 3/16; H01P 5/00; H01P 5/08; H01P 5/107; H01P 11/00

See application file for complete search history.

#### (56) References Cited

#### U.S. PATENT DOCUMENTS


7,372,120 B1 5/2008 Towle et al. 7,439,822 B2 10/2008 Shimura et al (Continued)

Primary Examiner — Hoang Nguyen (74) Attorney, Agent, or Firm — Ramey & Schwaller,

#### (57) ABSTRACT

An assembly for confining electromagnetic radiation in a waveguide. The assembly comprises a waveguide, comprising walls surrounding a cavity and an aperture in the walls that opens to the cavity, and a substrate assembly disposed in the aperture. The substrate assembly comprises a substrate comprising an antenna, wherein the antenna is located within the cavity and is configured for transmission of radiation within the cavity. The substrate assembly comprises an integrated circuit (IC) electrically connected to the substrate, where the IC comprises semi-conductor components and a ground plane on one side of the IC. The ground plane is located between the IC semi-conductor components and the antenna. The ground plane is located across the aperture to reduce the area of the aperture and to reflect some of the radiation directed to the aperture back into the cavity.

#### 18 Claims, 6 Drawing Sheets





US009893429B2

# (12) United States Patent Yang et al.

# (54) WIDEBAND SLOT ANTENNA FOR WIRELESS COMMUNICATION DEVICES

(71) Applicant: Futurewei Technologies, Inc., Plano, TX (US)

(72) Inventors: Shing Lung Steven Yang, San Diego,

CA (US); Hongyu Wang, Shenzhen (CN); Ping Shi, San Diego, CA (US); Daejoung Kim, San Diego, CA (US); Wee Kian Toh, San Diego, CA (US)

(73) Assignee: **Futurewei Technologies, Inc.**, Plano, TX (US)

(\*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 283 days.

(21) Appl. No.: 13/792,512

(22) Filed: Mar. 11, 2013

(65) Prior Publication Data

US 2014/0253399 A1 Sep. 11, 2014

(51) Int. Cl. *H01Q 13/10* (2006.01) *H01Q 21/30* (2006.01)

(52) U.S. Cl. CPC ...... *H01Q 13/106* (2013.01); *H01Q 21/30* 

#### (56) References Cited

#### U.S. PATENT DOCUMENTS

### (10) Patent No.: US 9,893,429 B2

### (45) **Date of Patent:** Feb. 13, 2018

7,551,142	2 B1*	6/2009	Zhang H01Q 1/243
			343/700 MS
7,642,964	4 B2 *	1/2010	DiNallo H01Q 1/243
			343/700 MS
7,808,435	5 B2*	10/2010	Nagumo H01Q 1/243
			343/700 MS
8,085,202	2 B2*	12/2011	Ayatollahi H01Q 1/243
			343/700 MS
2009/0153423	3 A1*	6/2009	DiNallo H01Q 1/243
			343/767
2009/0153424	1 A1*	6/2009	Ryou et al 343/767
2010/0238079	) A1		Ayatollahi et al.
		(Con	tinued)

#### FOREIGN PATENT DOCUMENTS

CN	1230037 A	9/1999
CN	201191647 Y	2/2009
CN	101577363 A	11/2009
	(Con	tinued)

#### OTHER PUBLICATIONS

Han, C., et al., "Wireless Communication Device with an Antenna Adjacent to an Edge of the Device," U.S. Appl. No. 13/278,836, filed Oct. 21, 2011, 34 pages.


(Continued)

Primary Examiner — Dameon E Levi Assistant Examiner — Walter Davis (74) Attorney, Agent, or Firm — Conley Rose, P.C.

#### (57) ABSTRACT

An antenna comprising a conductive base comprising a west edge, an east edge, a north edge, a south edge, and a center axis, a left slot of nonconductive material extending from the south edge toward the north edge and positioned between the west edge and the center axis, and a right slot of nonconductive material extending from the south edge toward the north edge and positioned between the east edge and the center axis.

### 20 Claims, 8 Drawing Sheets





US009893432B2

# (12) United States Patent Rumpf et al.

# (54) ANISOTROPIC METAMATERIALS FOR ELECTROMAGNETIC COMPATIBILITY

(71) Applicant: Board of Regents, The University of Texas System, Austin, TX (US)

(72) Inventors: Raymond C. Rumpf, El Paso, TX (US); Cesar R. Garcia, Westminster, CO (US)

(73) Assignee: BOARD OF REGENTS, THE UNIVERSITY OF TEXAS SYSTEM, Austin, TX (US)

(\*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: 15/625,398

(22) Filed: Jun. 16, 2017

(65) Prior Publication Data

US 2017/0288301 A1 Oct. 5, 2017

#### Related U.S. Application Data

- (63) Continuation of application No. 14/747,914, filed on Jun. 23, 2015, now Pat. No. 9,768,515.
- (60) Provisional application No. 62/016,478, filed on Jun. 24, 2014.
- (51) Int. Cl. H01Q 15/02 H01Q 15/00 (2006.01)(2006.01) H01Q 1/52 (2006.01)H01Q 1/24 (2006.01)H01Q 19/06 (2006.01)H01Q 3/44 (2006.01)H01Q 9/26 (2006.01)H01Q 3/46 (2006.01)H01Q 15/08 (2006.01)

## (10) Patent No.: US 9,893,432 B2

(45) **Date of Patent:** Feb. 13, 2018

H01Q 19/062 (2013.01)

Field of Classification Search

CPC ...... H01Q 15/0006; H01Q 9/26; H01Q 15/08;

H01Q 1/243; H01Q 3/44; H01Q 19/062;

H01Q 3/46

USPC ....... 343/909, 908, 911, 702, 700, 753, 754 See application file for complete search history.

#### (56) References Cited

#### U.S. PATENT DOCUMENTS

2008/0258981 A1\* 10/2008 Achour ...... H01Q 21/065 343/702

### OTHER PUBLICATIONS


Aspnes, D. E., "Local-field effects and effective-medium theory: A microscopic perspective," Am. J. Phys. (1982) 50 (8):704-709. (Continued)

Primary Examiner — Joseph Lauture (74) Attorney, Agent, or Firm — Cantor Colburn LLP

#### (57) ABSTRACT

An electromagnetic device includes: a first layer having a first material with a first dielectric constant, the first layer having a plurality of channels or holes filled with a second material with a second dielectric constant that is different from the first dielectric constant; and, a second layer having a plurality of antennas disposed on the first layer. Adjacent ones of the plurality of channels of the first layer have an average spacing therebetween of less than one quarter of an operating wavelength of at least one of the plurality of antennas.

#### 28 Claims, 19 Drawing Sheets





US009894787B2

# (12) United States Patent Merz et al.

# (10) Patent No.: US 9,894,787 B2 (45) Date of Patent: Feb. 13, 2018

# (54) SYSTEMS AND METHODS FOR COUPLING SECTIONS OF AN ELECTRONIC DEVICE

(71) Applicant: Apple Inc., Cupertino, CA (US)

(72) Inventors: Nicholas Merz, Cupertino, CA (US); Daniel Jarvis, Cupertino, CA (US)

(73) Assignee: **APPLE INC.**, Cupertino, CA (US)

(\*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35

U.S.C. 154(b) by 394 days.

(21) Appl. No.: 14/323,566

(22) Filed: Jul. 3, 2014

(65) Prior Publication Data

US 2014/0311767 A1 Oct. 23, 2014

#### Related U.S. Application Data

- (63) Continuation of application No. 12/987,741, filed on Jan. 10, 2011, now Pat. No. 8,772,650.
- (51) Int. Cl.

  #05K 5/02 (2006.01)

  G06F 1/16 (2006.01)

  (Continued)
- (52) U.S. CI.

  CPC .......... *H05K 5/0247* (2013.01); *G06F 1/1656* (2013.01); *H05K 5/0004* (2013.01); (Continued)
- (58) Field of Classification Search

CPC .. G06F 1/1656; H05K 5/0004; H05K 5/0217; H05K 5/0247

See application file for complete search history.

#### (56) References Cited

#### U.S. PATENT DOCUMENTS

5,298,681 A 7,358,906 B2 3/1994 Swift et al. 4/2008 Sato et al. (Continued)

#### FOREIGN PATENT DOCUMENTS

CN 2737128 10/2005 CN 1809255 7/2006 (Continued)

#### OTHER PUBLICATIONS

Chinese Office Action, Application No. ZL2012200833488, 6 pages, dated Jul. 23, 2013.


(Continued)

Primary Examiner — William H Mayo, III Assistant Examiner — Hiram E Gonzalez (74) Attorney, Agent, or Firm — Brownstein Hyatt Farber Schreck, LLP

#### (57) ABSTRACT

This is directed to systems and methods for coupling sections of an electronic device together. Sections of an electronic device can be coupled together via "knuckles." The particular shape and structure of the knuckles can be based on various design considerations. For example, in some embodiments each section can function as an individual antenna. In this case, the knuckles can be designed in order to provide electrical isolation between the sections, thus allowing proper operation of the antennas. For example, the knuckles can be formed from a dielectric material, etc. As another design example, the knuckles can be designed in order to provide increased strength in areas of high strain, and/or to counteract torsional twisting in areas of high impact. As yet another design example, the knuckle can be designed in a manner that is aesthetically pleasing or which otherwise meets cosmetic requirements.

#### 18 Claims, 15 Drawing Sheets





# (12) United States Patent Wang et al.

(54) MOBILE TERMINAL

(71) Applicant: HUAWEI DEVICE (DONGGUAN)

CO., LTD., Dongguan (CN)

(72) Inventors: Hongyu Wang, Shenzen (CN); Yufei

Sun, Shanghai (CN); Huimin Zhang, Shenzhen (CN); Dongjian Zhang, Shenzhen (CN); Kun Feng, Shanghai

Assignee: HUAWEI DEVICE (DONGGUAN)

CO., LTD., Dongguan (CN)

Subject to any disclaimer, the term of this Notice:

patent is extended or adjusted under 35

U.S.C. 154(b) by 0 days.

(21) Appl. No.: 14/947,042

(22)Filed: Nov. 20, 2015

(65) **Prior Publication Data** 

> US 2016/0079659 A1 Mar. 17, 2016

### Related U.S. Application Data

Continuation of application No. PCT/CN2014/ 077949, filed on May 21, 2014.

#### (30) Foreign Application Priority Data

May 22, 2013 (CN) ...... 2013 1 0196497

(51) Int. Cl. H01Q 1/24 (2006.01)H01Q 1/48

(2006.01)

(Continued)

(52) U.S. Cl. .... H01Q 1/243 (2013.01); H01Q 1/24 (2013.01); H01Q 1/48 (2013.01); H01Q 21/28 (2013.01); *H04M 1/0283* (2013.01)

#### US 9,899,728 B2 (10) Patent No.:

(45) Date of Patent: Feb. 20, 2018

#### (58)Field of Classification Search

See application file for complete search history.

#### References Cited (56)

#### U.S. PATENT DOCUMENTS

7,551,142	B1*	6/2009	Zhang	H01Q 1/243
				343/700 MS
7,825,863	B2 *	11/2010	Martiskainen	
2011/0254741	A 1 *	10/2011	Ishimiya	343/700 MS
2011/0234741	AI	10/2011	Ishininya	343/702

#### FOREIGN PATENT DOCUMENTS

201282187 7/2009 CN CN 201491423 U (Continued)

#### OTHER PUBLICATIONS

International Search Report dated Jul. 9, 2014, in corresponding International Application No. PCT/CN2014/077949.


(Continued)

Primary Examiner — Jessica Han Assistant Examiner — Hai Tran (74) Attorney, Agent, or Firm — Staas & Halsey LLP

#### ABSTRACT

An embodiment of the present invention discloses a mobile terminal, which relates to the field of communications technologies and is invented to enable the mobile terminal to have relatively good metal texture and appearance. The mobile terminal includes a metal rear cover used as a grounding component and at least one antenna, where the antenna includes a grounding pin, and the grounding pin is electrically connected to the metal rear cover. The present invention is mainly applicable to mobile terminal products.

#### 17 Claims, 8 Drawing Sheets





# (12) United States Patent Mai et al.

#### US 9,899,729 B2 (10) Patent No.: (45) Date of Patent: Feb. 20, 2018

#### (54) ANTENNA SYSTEM

- (71) Applicants: Jianchun Mai, Shenzhen (CN); Chao Wang, Shenzhen (CN)
- (72)Inventors: Jianchun Mai, Shenzhen (CN); Chao Wang, Shenzhen (CN)
- AAC TECHNOLOGIES PTE. LTD., Assignee: Singapore (SG)
- (\*) Notice: Subject to any disclaimer, the term of this
- patent is extended or adjusted under 35 U.S.C. 154(b) by 162 days.
- (21) Appl. No.: 15/011,458
- Jan. 29, 2016 (22)Filed:
- (65)**Prior Publication Data** US 2017/0012341 A1 Jan. 12, 2017
- (30)Foreign Application Priority Data

Jul. 9, 2015 (CN) ...... 2015 2 0493051 U

(51) Int. Cl. H01Q 1/24 (2006.01)H01Q 13/10 (2006.01)H01Q 13/16 (2006.01)H01Q 21/28 (2006.01)

(52) U.S. Cl. CPC .... H01Q 1/243 (2013.01); H01Q 13/10 (2013.01); H01Q 13/16 (2013.01); H01Q **21/28** (2013.01)

(58) Field of Classification Search CPC ...... H01Q 21/28; H01Q 1/24; H01Q 13/10 See application file for complete search history.

#### (56)**References Cited**

#### U.S. PATENT DOCUMENTS

9,026,187	B2*	5/2015	Huang H05K 5/0086
			455/41.1
2011/0001673	A1*	1/2011	You H01Q 1/243
			343/702
2012/0105287	A1*	5/2012	Jung H01Q 1/243
			343/702
2012/0176278	A1*	7/2012	Merz H01Q 1/243
			343/702
2013/0135158	A1*	5/2013	Faraone H01Q 13/10
			343/702
2014/0078008	A1*	3/2014	Kang H01Q 5/35
			343/702
2014/0375509	A1*	12/2014	Vance H01Q 1/243
			343/702
2017/0005393	A1*	1/2017	Wu H01Q 1/243
w 1, 11			


\* cited by examiner

Primary Examiner — Huedung Mancuso (74) Attorney, Agent, or Firm — Na Xu; IPro, PLLC

#### ABSTRACT

An antenna system applicable to a mobile communication device is provided in the present disclosure. The antenna system includes a metal shell with a metal frame and a metal back cover, a printed circuit board (PCB) housed in the metal shell, and an antenna part with a first feed point and a second feed point. A first break point and a second break point are formed at two opposite sides of the metal frame; a first gap and a second gap are respectively formed at two opposite sides of the metal back cover for defining a first clearance area and a second clearance area. The first feed point is located in the first clearance area and contacts a left frame portion of the metal frame; the second feed point is located in the second clearance area and contacts a right frame portion of the metal frame.

#### 8 Claims, 2 Drawing Sheets





US009899730B2

# (12) United States Patent Yang et al.

#### (54) BROADBAND ANTENNA IN THE CRASH PAD FOR VEHICLE

(71) Applicants: Tae Hoon Yang, Gyeonnggi-do (KR);
Sung Min Cho, Gyeonggi-do (KR);
Sang A Ju, Gyeonggi-do (KR); Byeong
Chan Yu, Gyeonggi-do (KR); Sang
Hoon Lim, Gyeonggi-do (KR); Jin
Kyu Hwang, Incheon (KR)

(72) Inventors: Tae Hoon Yang, Gyeonnggi-do (KR);
Sung Min Cho, Gyeonggi-do (KR);
Sang A Ju, Gyeonggi-do (KR); Byeong
Chan Yu, Gyeonggi-do (KR); Sang
Hoon Lim, Gyeonggi-do (KR); Jin
Kyu Hwang, Incheon (KR)

(73) Assignee: INFAC ELECS CO., LTD. (KR)

(\*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: 15/600,239

(22) Filed: May 19, 2017

(65) Prior Publication Data

US 2017/0346174 A1 Nov. 30, 2017

(30) Foreign Application Priority Data

May 31, 2016 (KR) ...... 10-2016-0067483

(51) Int. Cl.

H01Q 1/32 (2006.01)

H01Q 5/371 (2015.01)

(Continued)

(52) U.S. CI.

CPC ............. H01Q 1/3291 (2013.01); H01Q 5/371

(2015.01); H04B 1/3827 (2013.01); H04B

1/40 (2013.01); H01Q 21/28 (2013.01); H01Q

21/30 (2013.01)

# (10) Patent No.: US 9,899,730 B2

(45) **Date of Patent:** Feb. 20, 2018

#### (56) References Cited

#### U.S. PATENT DOCUMENTS

#### FOREIGN PATENT DOCUMENTS


JP 3162787 U 8/2010 KR 10-2010-0092366 A 8/2010 (Continued)

Primary Examiner — Hsin-Chun Liao (74) Attorney, Agent, or Firm — Tarolli, Sundheim, Covell & Tummino LLP

#### (57) ABSTRACT

Disclosed herein is a vehicle broadband antenna that is an antenna for LTE & V2X installed in the vicinity of a crash pad of a vehicle. The crash pad broadband antenna is installed in the vicinity of a vehicle crash pad and includes a main PCB, an LTE low-band antenna pattern formed on the main PCB to transmit and receive an LTE low-band signal, a first sub-PCB having LTE high-band antenna patterns configured to transmit and receive an LTE highband signal, the first sub-PCB being vertically coupled to the main PCB, and a first terminal connected to an external communication module for transmitting and receiving the signals to/from the LTE low-band antenna pattern and the LTE high-band antenna patterns. It is possible to overcome existing spatial limitations by applying the broadband antenna to the vehicle, and to significantly reduce the time required to manufacture and develop an existing mold.

#### 12 Claims, 7 Drawing Sheets

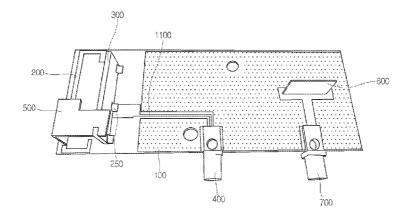



### (12) United States Patent Shimura et al.

US 9,899,738 B2 (10) Patent No.: (45) Date of Patent: Feb. 20, 2018

See application file for complete search history.

# (54) ANTENNA

(71) Applicant: CANON KABUSHIKI KAISHA,

Tokyo (JP)

(72) Inventors: Hajime Shimura, Tokyo (JP); Jun

Morita, Tokyo (JP)

- Assignee: Canon Kabushiki Kaisha, Tokyo (JP)
- Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 707 days.
- (21) Appl. No.: 14/454,587
- Aug. 7, 2014 (22)Filed:
- (65)**Prior Publication Data** Feb. 26, 2015 US 2015/0054706 A1

#### (30)Foreign Application Priority Data

Aug. 20, 2013	(JP)	 2013-170820
Jul. 31, 2014	(JP)	 2014-156277

(51)	Int. Cl.	
	H01Q 11/00	(2006.01)
	H01Q 9/04	(2006.01)
	H01Q 1/24	(2006.01)
	H01Q 9/40	(2006.01)
	H01Q 9/42	(2006.01)
	H01Q 5/371	(2015.01)
	H01Q 1/50	(2006.01)
	H010 5/30	(2015.01)

(52) U.S. Cl. 

(58) Field of Classification Search CPC ...... H01Q 9/24; H01Q 1/243

#### References Cited (56)

#### U.S. PATENT DOCUMENTS

6,040,803 A 3/2000 Spall 9/2002 Poilasne et al. 11/2003 Usui et al. 6,456,243 B1 6,646,607 B2 (Continued)

#### FOREIGN PATENT DOCUMENTS

CN	101510630 A	8/2009
CN	102570003 A	7/2012
	(Conti	nued)

#### OTHER PUBLICATIONS

European Office Action dated Jan. 19, 2015 for counterpart European Patent Appln No. 14181468.1. Chinese Office Action dated Sep. 2, 2016 in Chinese Application No. 201410410737.0.


#### (Continued)

Primary Examiner - Graham Smith (74) Attorney, Agent, or Firm — Fitzpatrick, Cella, Harper & Scinto

#### ABSTRACT

An antenna that comprises a feeding point, a first conductor and a second conductor is provided. The first conductor is connected to the feeding point, includes, as an open end, an end which is not connected to the feeding point, and has a linear shape. The second conductor is formed to branch from the first conductor, includes, as an open end, an end on an opposite side of a point branching from the first conductor, and has a linear shape. At least part of the first conductor and at least part of the second conductor are formed on different planes and include coupling portions electromagnetically coupled to each other.

#### 12 Claims, 18 Drawing Sheets

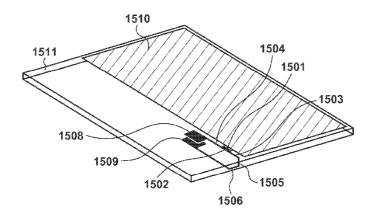



US009899739B2

# (12) United States Patent Hung et al.

# (10) Patent No.: US 9,899,739 B2

### (45) **Date of Patent:** \*Feb. 20, 2018

#### (54) HYBRID ANTENNA

(71) Applicant: MediaTek Inc., Hsin-Chu (TW)

(72) Inventors: **Kuo-Fong Hung**, Changhua (TW); **Chia-Wei Chi**, Taipei (TW)

(73) Assignee: **MEDIATEK INC.**, Hsin-Chu (TW)

(\*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35

U.S.C. 154(b) by 0 days.

This patent is subject to a terminal dis-

claimer.

(21) Appl. No.: 15/162,850

(22) Filed: May 24, 2016

### (65) Prior Publication Data

US 2016/0268690 A1 Sep. 15, 2016

#### Related U.S. Application Data

- (62) Division of application No. 13/868,383, filed on Apr. 23, 2013, now Pat. No. 9,608,332.
- (51) Int. Cl.

  #010 1/38 (2006.01)

  #010 9/42 (2006.01)

  #010 1/24 (2006.01)

  #010 5/357 (2015.01)

#### 162 160 160 160 160 160 172 150 150 150 110 140, 150, 160, 170, 180 312 180 182 182 183 311

### (58) Field of Classification Search

CPC ............. H01Q 1/243; H01Q 1/38; H01Q 9/42 See application file for complete search history.

#### (56) References Cited

#### U.S. PATENT DOCUMENTS

9,123,994	B2	9/2015	Lee et al.	
9,608,332	B2 *	3/2017	Hung	H01Q 9/42
2007/0008221	A1	1/2007	Tseng	
2009/0256763	A1	10/2009	Chi et al.	
2011/0109509	A1	5/2011	Chou et al.	

#### FOREIGN PATENT DOCUMENTS

CN	102800928	11/2012
CN	202633498	12/2012
JP	10270920	10/1998


\* cited by examiner

Primary Examiner — Dieu H Duong (74) Attorney, Agent, or Firm — McClure, Qualey & Rodack, LLP

#### (57) ABSTRACT

A hybrid antenna includes a dielectric substrate and a stamping element. The stamping element includes a main radiator, a first holder, a second holder, a feeding element, and an extension branch. The main radiator is substantially disposed above the dielectric substrate. The first holder is coupled to a first end of the main radiator. The second holder is coupled to a second end of the main radiator. The feeding element is coupled to a signal source. The extension branch is substantially disposed below the dielectric substrate, and is coupled between the second holder and the feeding element.

#### 4 Claims, 8 Drawing Sheets





US009899740B2

# (12) United States Patent Hung et al.

### (10) Patent No.: US 9,899,740 B2

### (45) **Date of Patent:** \*Feb. 20, 2018

#### (54) HYBRID ANTENNA

(71) Applicant: MediaTek Inc., Hsin-Chu (TW)

(72) Inventors: **Kuo-Fong Hung**, Changhua (TW); **Chia-Wei Chi**, Taipei (TW)

(73) Assignee: MEDIATEK INC., Hsin-Chu (TW)

(\*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35

U.S.C. 154(b) by 0 days.

This patent is subject to a terminal disclaimer.

(21) Appl. No.: 15/384,828

(22) Filed: Dec. 20, 2016

(65) Prior Publication Data

US 2017/0104273 A1 Apr. 13, 2017

#### Related U.S. Application Data

(63) Continuation of application No. 13/868,383, filed on Apr. 23, 2013, now Pat. No. 9,608,332.

(51)	Int. Cl.	
	H01Q 1/38	(2006.01)
	H01Q 9/42	(2006.01)
	H01Q 1/24	(2006.01)
	H01O 5/357	(2015.01)

(58) **Field of Classification Search** CPC ............. H01Q 1/243; H01Q 9/42; H01Q 1/38;

H01Q 5/357 See application file for complete search history.

#### (56) References Cited

#### U.S. PATENT DOCUMENTS

9,123,994 9,608,332			Lee et al. Hung	H01O 9/42
2007/0008221	$\mathbf{A}1$	1/2007	Tseng	
2009/0256763	A1	10/2009	Chi	
2011/0109509	A1	5/2011	Chou et al.	

#### FOREIGN PATENT DOCUMENTS

CN	102800928	11/2012
CN	202633498	12/2012
JP	10270920	10/1998

\* cited by examiner


Primary Examiner — Dieu H Duong (74) Attorney, Agent, or Firm — McClure, Qualey & Rodack, LLP

#### (57) ABSTRACT

A hybrid antenna (and related method for manufacturing the antenna) includes a dielectric substrate and a stamping element. The stamping element includes a main radiator, a first holder, a second holder, a feeding element, an extension branch, a first trace, and a first via. The main radiator is substantially disposed above the dielectric substrate. The first holder is coupled to a first end of the main radiator. The second holder is coupled to a second end of the main radiator. The feeding element is coupled to a signal source. The extension branch is substantially disposed below the dielectric substrate, and is coupled between the second holder and the feeding element. The first trace is disposed on a second surface of the dielectric substrate, and the first via is formed through the dielectric substrate, and coupled between an end of the first trace and the first holder.

#### 22 Claims, 8 Drawing Sheets

200

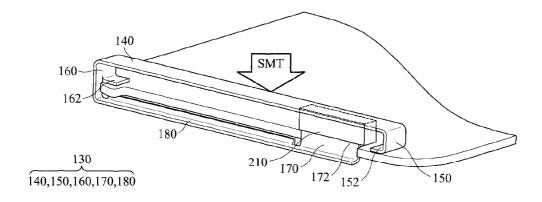



# (12) United States Patent Chou

#### US 9,900,038 B2 (10) Patent No.:

#### (45) Date of Patent: Feb. 20, 2018

#### (54) COMMUNICATION DEVICE

(71) Applicant: JIENG TAI INTERNATIONAL

ELECTRONIC CORP., New Taipei

(72) Inventor: Yu-Pang Chou, New Taipei (TW)

Assignee: JIENG TAI INTERNATIONAL

ELECTRONIC CORP., New Taipei

(TW)

(\*) Notice: Subject to any disclaimer, the term of this

patent is extended or adjusted under 35

U.S.C. 154(b) by 0 days.

(21) Appl. No.: 15/245,158

(22) Filed: Aug. 23, 2016

(65)**Prior Publication Data** 

US 2017/0294931 A1 Oct. 12, 2017

(30)Foreign Application Priority Data

Apr. 8, 2016 (TW) ...... 105111107 A

(51) Int. Cl.

H04B 1/40 (2015.01)H04B 1/3827 (2015.01)H01Q 1/52 (2006.01)

(52) U.S. Cl. CPC ...... H04B 1/3833 (2013.01); H01Q 1/52

<u>530</u>

#### Field of Classification Search (58)

CPC ....... H04B 1/40; H04B 1/3822; H04B 1/406; H04B 1/44; H04B 1/48; H04B 1/525; H04B 1/18 

See application file for complete search history.

#### (56)References Cited

#### U.S. PATENT DOCUMENTS

8,903,322	B2 *	12/2014	Wang H04W 88/02
			455/63.1
			Asrani H04B 1/68
2014/0333496	A1*	11/2014	Hu H01Q 1/243
			343/745
2015/0172426	$\Lambda 1*$	6/2015	Asrani H04B 1/40
			455/77


#### \* cited by examiner

Primary Examiner - Nhan Le (74) Attorney, Agent, or Firm — CKC & Partners Co., Ltd.

#### (57)**ABSTRACT**

A communication device includes an antenna unit, an adjustment unit and a sensing and processing unit. The sensing and processing unit is electrically coupled to the antenna unit and the adjustment unit. The antenna unit is configured to transmit a radio frequency (RF) signal. The adjustment unit is configured to adjust a frequency and a bandwidth of the RF signal. The sensing and processing unit is configured to sense a capacitance, so as to control the adjustment unit to adjust the frequency of the RF signal according to the capacitance, and to control the adjustment unit to adjust the bandwidth of the RF signal according to a system signal.

#### 9 Claims, 5 Drawing Sheets



(2013.01)



#### LIS009905908B2

# (12) United States Patent Tang et al.

US 9,905,908 B2

(45) Date of Patent:

(10) Patent No.:

Feb. 27, 2018

# (54) ANTENNA STRUCTURE WITH PROXIMITY SENSOR

(71) Applicant: LUXSHARE-ICT CO., LTD., Taipei

Inventors: Ching Chung Tang, Taoyuan County (TW); Sheng Hsin Chang, Kaohsiung

(TW)

(73) Assignee: LUXSHARE PRECISION
INDUSTRY CO., LTD., Shenzhen,
Guangdong Province (CN)

(\*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35

U.S.C. 154(b) by 226 days.

(21) Appl. No.: 14/154,858

(22) Filed: Jan. 14, 2014

### (65) Prior Publication Data

US 2015/0200447 A1 Jul. 16, 2015

(51) Int. Cl.

H01Q 1/44 (2006.01)

H01Q 5/00 (2015.01)

H01Q 1/24 (2006.01)

H01Q 5/371 (2015.01)

H01Q 5/378 (2015.01)

(58) Field of Classification Search

CPC ...... H01Q 1/44; H01Q 1/2258; H01Q 1/2266; H01Q 1/2291; H01Q 1/24; H01Q 1/241;

#### (56) References Cited

#### U.S. PATENT DOCUMENTS

8,649,833 B1*	2/2014	Lee	H01Q 5/335
8,686,297 B2*	4/2014	Shiu	455/575.7 H05K 1/028
			174/250


\* cited by examiner

Primary Examiner — Tho G Phan Assistant Examiner — Patrick Holecek (74) Attorney, Agent, or Firm — Cheng-Ju Chiang

#### (57) ABSTRACT

An antenna structure includes a dielectric layer, on one side thereof a patterned conductive layer, a proximity sensor and a capacitor are provided. The patterned conductive layer includes a first and a second conductive layer that together form a coupled-fed antenna and respectively have a first and a second feed terminal connected to a signal feed line and a ground signal line. The proximity sensor includes a peripheral circuit connected to the second feed terminal, and a capacitance to digital circuit. The capacitor is connected between the ground signal line and the second feed terminal. By integrating the coupled-fed antenna and the proximity sensor on one circuit substrate, a part of the antenna can be used as the proximity sensor's capacitor electrode to reduce the volume and manufacturing cost of the antenna, and the proximity sensor is not interfered by other parts of the antenna and thereby has increased sensitivity.

### 9 Claims, 9 Drawing Sheets

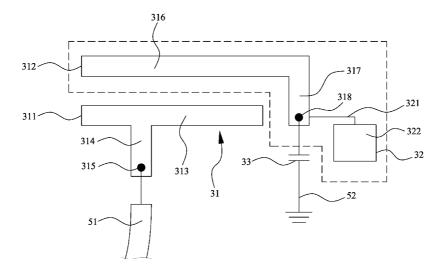



## (12) United States Patent Liou et al.

#### US 9,905,909 B2 (10) Patent No.: Feb. 27, 2018

#### (45) Date of Patent:

#### (54) ANTENNA MODULE AND WIRELESS COMMUNICATION DEVICE USING SAME

(71) Applicant: Chiun Mai Communication Systems,

Inc., New Taipei (TW)

(72)Inventors: Geng-Hong Liou, New Taipei (TW);

Yen-Hui Lin, New Taipei (TW)

Assignee: Chiun Mai Communication Systems,

Inc., New Taipei (TW)

Subject to any disclaimer, the term of this Notice:

patent is extended or adjusted under 35 U.S.C. 154(b) by 188 days.

- Appl. No.: 14/868,551 (21)
- (22)Filed: Sep. 29, 2015

#### (65)**Prior Publication Data**

US 2017/0093020 A1 Mar. 30, 2017

(51) Int. Cl. H01Q 1/24 (2006.01)

H01Q 1/50 (2006.01)H01Q 5/328 (2015.01)U.S. Cl.

H01Q 1/243 (2013.01); H01Q 1/50 CPC ..... (2013.01); H01Q 5/328 (2015.01)

(58) Field of Classification Search CPC ...... H01Q 1/243; H01Q 1/50; H01Q 13/10 ...... 343/702, 767 See application file for complete search history.

#### (56)References Cited

#### U.S. PATENT DOCUMENTS

7,079,079 B2*	7/2006	Jo H01Q 1/243
		343/700 MS
2014/0078008 A1*	3/2014	Kang H01Q 5/35 343/702
2014/0266922 A1*	9/2014	Jin H01Q 21/28
LOT WOLGOODEL TIT	3,201.	343/702
2014/0266938 A1*	9/2014	Ouyang H01Q 5/321
		343/729

\* cited by examiner


Primary Examiner — Dameon E Levi Assistant Examiner — Hasan Islam

(74) Attorney, Agent, or Firm - ScienBiziP, P.C.

#### ABSTRACT

An antenna module includes a metallic member and a first radiating portion. The metallic member defines a slot. The slot is configured to divide the metallic member into a first metallic portion and a second metallic portion. The second metallic portion is spaced apart from the first metallic portion. The first radiating portion is positioned in the second metallic portion and is spaced apart from the second metallic portion. The first metallic portion is grounded. The first radiating portion is configured to receive a current signal and couple the current signal to the second metallic portion. The second metallic portion and the first metallic portion are configured to cooperatively activate a plurality of resonating modes through the slot.

### 18 Claims, 8 Drawing Sheets







US009905910B2

# (12) United States Patent Chen et al.

### (10) Patent No.: US 9,905,910 B2

### (45) **Date of Patent:** Feb. 27, 2018

# (54) ELECTRONIC DEVICE AND MULTI-BAND ANTENNA

- (71) Applicant: HON HAI PRECISION INDUSTRY CO., LTD., New Taipei (TW)
- (72) Inventors: **Wei-Yu Chen**, New Taipei (TW); **Yueh-Chu Lin**, New Taipei (TW)
- (73) Assignee: HON HAI PRECISION INDUSTRY CO., LTD., New Taipei (TW)
- (\*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35
  - U.S.C. 154(b) by 102 days.
- (21) Appl. No.: 14/886,615

Filed:

(22)

(65) Prior Publication Data

US 2017/0047950 A1 Feb. 16, 2017

Oct. 19, 2015

### (30) Foreign Application Priority Data

Aug. 11, 2015 (CN) ...... 2015 1 0488121

(51) Int. Cl.

#01Q 1/24 (2006.01)

#01Q 9/42 (2006.01)

#01Q 21/28 (2006.01)

#01Q 5/371 (2015.01)

#### (58) Field of Classification Search

None

See application file for complete search history.

#### (56) References Cited

#### U.S. PATENT DOCUMENTS

8,742,999	B2*	6/2014	Amari H01Q 9/0407
			343/700 MS
9,577,332	B2 *		Chen H01Q 1/243
2009/0284433	A1*	11/2009	Tsutsumi H01Q 1/243
			343/825
2014/0057578	A1*	2/2014	Chan H04B 1/006
			455/77
2014/0092795	A1*	4/2014	Granger-Jones H04L 5/08
			370/297
2015/0009079	A1*	1/2015	Bojer H01Q 9/145
			343/745
2015/0084817	A1*	3/2015	Yong H01Q 1/243
			343/702
2016/0087343	A1*	3/2016	Chang H01Q 1/245
			343/720


<sup>\*</sup> cited by examiner

Primary Examiner — Christopher Grey (74) Attorney, Agent, or Firm — ScienBiziP, P.C.

#### (57) ABSTRACT

An electronic device with multi-band antenna includes a first antenna frame, a second antenna frame, and a switching unit being electrically coupled between the first antenna frame and the second antenna frame. A first feed point only is located on the first antenna frame and multiple electrical connection points, a second feed point, and a ground point are located on the second antenna frame. One end of the first antenna frame can be connected to one of the electrical connection points by controlling the switching unit, and multiple radiating elements, able to radiate signals in different frequency bands, are formed on the multi-band antenna. Radiating elements are formed between the first feed point and the second feed point and the ground point.

#### 11 Claims, 1 Drawing Sheet





US009905911B2

# (12) United States Patent Chen et al.

### (10) Patent No.: US 9,905,911 B2

### (45) **Date of Patent:** Feb. 27, 2018

#### (54) ANTENNA FOR ELECTRONIC DEVICE

(71) Applicant: **HON HAI PRECISION INDUSTRY CO., LTD.**, New Taipei (TW)

(72) Inventors: Wei-Yu Chen, New Taipei (TW); Yueh-Chu Lin, New Taipei (TW)

(73) Assignee: HON HAI PRECISION INDUSTRY CO., LTD., New Taipei (TW)

(\*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 193 days.

(21) Appl. No.: 14/920,613

(22) Filed: Oct. 22, 2015

(65) Prior Publication Data

US 2017/0062930 A1 Mar. 2, 2017

(30) Foreign Application Priority Data

Aug. 31, 2015 (CN) ...... 2015 1 0546222

(51) Int. Cl. H01Q 9/42 (2006.01) H01Q 1/24 (2006.01) H01Q 5/35 (2015.01)

(52) U.S. Cl. CPC ...... *H01Q 1/243* (2013.01); *H01Q 5/35* (2015.01); *H01Q 9/42* (2013.01)

(58) **Field of Classification Search**CPC .............. H01Q 1/243; H01Q 5/35; H01Q 9/42

#### (56) References Cited

#### U.S. PATENT DOCUMENTS

2012/0119955	A1*	5/2012	Milosavljevic	H01Q 1/243
2016/0197407	A1*	7/2016	Tanaka	343/702 H01Q 1/243
				343/845


\* cited by examiner

Primary Examiner — Andrea Lindgren Baltzell (74) Attorney, Agent, or Firm — ScienBiziP, P.C.

#### (57) ABSTRACT

An electronic device includes a control module, a first antenna frame, and a second antenna frame. A first ground point, a first feed point, and a second ground point are respectively located on the first antenna frame. A second feed point, a third ground point, and a third feed point are respectively located on the second antenna frame. A switching unit and a low-pass circuit being electrically coupled between one end portion of the first antenna frame and one end portion of the second antenna frame, wherein the switching unit is controlled by the control module to selectively connect the first antenna frame and the second antenna frame. If the switching unit is closed, an antenna element formed between the first ground point and the third feed point is enabled, and the antenna element is operated to receive and/or transmit low frequency signal.

#### 13 Claims, 1 Drawing Sheet





US009905912B2

# (12) United States Patent Wu et al.

### (10) Patent No.: US 9,905,912 B2

### (45) **Date of Patent:** Feb. 27, 2018

#### (54) ANTENNA MODULE

(71) Applicant: **PEGATRON CORPORATION**, Taipei

(1W)

(72) Inventors: Chien-Yi Wu, Taipei (TW);

Cheng-Hsiung Wu, Taipei (TW); Chao-Hsu Wu, Taipei (TW); Shih-Keng Huang, Taipei (TW)

(73) Assignee: **PEGATRON CORPORATION**, Taipei

(TW)

(\*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35

U.S.C. 154(b) by 0 days.

(21) Appl. No.: 15/335,461

(22) Filed: Oct. 27, 2016

(65) Prior Publication Data

US 2017/0162932 A1 Jun. 8, 2017

#### (30) Foreign Application Priority Data

Dec. 3, 2015 (TW) ...... 104140521 A

(51) Int. Cl.

#010 1/24 (2006.01)

#010 21/00 (2006.01)

#010 1/48 (2006.01)

#010 13/10 (2006.01)

**21/00** (2013.01)

(58) Field of Classification Search

CPC ....... H01Q 13/10; H01Q 1/243; H01Q 1/48; H01Q 21/00; H01Q 1/24

See application file for complete search history.

#### (56) References Cited

#### U.S. PATENT DOCUMENTS

6,421,014	B1 *	7/2002	Sanad	H01Q 1/243		
6,639,560	B1*	10/2003	Kadambi	343/700 MS H01Q 1/243		
6 707 428	R2 *	3/2004	Gram	343/700 MS		
				343/700 MS		
, ,			Milosavljevic	343/702		
8,547,283	B2	10/2013	Wong et al.			
(Continued)						

#### FOREIGN PATENT DOCUMENTS


TW I487198 B 6/2015

Primary Examiner — Tho G Phan (74) Attorney, Agent, or Firm — CKC & Partners Co., Ltd.

#### (57) ABSTRACT

An antenna module includes a parasitic unit and a first antenna unit. The parasitic unit includes a first parasitic radiation portion and a second parasitic radiation portion. The second parasitic radiation portion is electrically connected to the first parasitic radiation portion. The first parasitic radiation portion and the second parasitic radiation portion surround a central area. The first antenna unit includes a feeding terminal, a ground terminal and a first radiation portion, in which the ground terminal is electrically connected to a ground portion. The feeding terminal is configured to transmit and receive a first antenna signal. The first radiation portion is configured to collaborate with the parasitic unit to generate a first resonant mode. The first resonant mode includes a central frequency, a frequency twice of the central frequency and a frequency three times of the central frequency.

#### 10 Claims, 9 Drawing Sheets

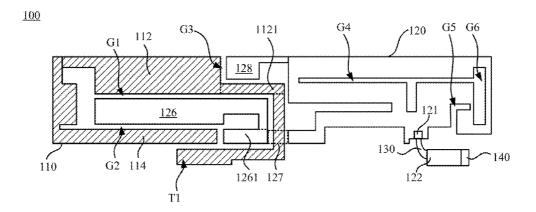



# (12) United States Patent Hung et al.

#### (54) ANTENNA STRUCTURE AND WIRELESS COMMUNICATION DEVICE USING SAME

(71) Applicant: Chiun Mai Communication Systems,

Inc., New Taipei (TW)

Inventors: Kai-Ting Hung, New Taipei (TW);

Cho-Kang Hsu, New Taipei (TW); Men-Hsueh Tsai, New Taipei (TW)

Chiun Mai Communication Systems, Assignee:

Inc., New Taipei (TW)

Notice: Subject to any disclaimer, the term of this

patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: 15/651,037

(22) Filed: Jul. 17, 2017

(65)**Prior Publication Data** 

US 2018/0026350 A1 Jan. 25, 2018

#### Related U.S. Application Data

Provisional application No. 62/364,876, filed on Jul. (60)

#### (30)Foreign Application Priority Data

Jun. 9, 2017 (TW) ...... 106119261 A

(51) Int. Cl. (2006.01) H04M 1/00 H01Q 1/24 (2006.01)H01Q 5/371 (2015.01)H01Q 5/10 (2015.01)H01Q 13/10 (2006.01)

(52) U.S. Cl. CPC ....

H01Q 1/243 (2013.01); H01Q 5/10 (2015.01); H01Q 5/371 (2015.01); H01Q 13/10 (2013.01)

US 9,905,913 B2 (10) Patent No.:

(45) Date of Patent: Feb. 27, 2018

Field of Classification Search

CPC ....... H01Q 1/243; H01Q 5/371; H01Q 13/10; H01Q 5/10

See application file for complete search history.

#### (56)References Cited

#### U.S. PATENT DOCUMENTS


8,842,048 B2*	9/2014	Kim H01Q 1/243	
8,954,122 B2*	2/2015	343/702 Wilmhoff H01Q 1/245	
9.035.840 B1*	5/2015	342/375 Lee H01Q 1/243	
9.105,968 B2*		343/702 Hong H01Q 1/243	
9,124,679 B2*	9/2015	Ash, Jr H01Q 1/243	
9,196,952 B2*		Tran H01Q 1/243 tinued)	

Primary Examiner — April G Gonzales (74) Attorney, Agent, or Firm — ScienBiziP, P.C.

#### ABSTRACT

An antenna structure includes a metal housing, a first feed portion, a first ground portion, a second ground portion, and a radiator. The metal housing includes a front frame, a backboard, and a side frame. The side frame defines a slot and the front frame defines a gap. The metal housing is divided into at least a long portion and a short portion by the slot and the gap. One end of the first feed portion is electrically connected to the long portion for feeding current to the long portion and another end of the first feed portion is electrically connected to the backboard. The first and second ground portions are both electrically connected to the long portion for grounding the long portion. The radiator is positioned in the metal housing, electrically connected to the backboard, and is spaced apart from the short portion.

### 20 Claims, 21 Drawing Sheets





## (12) United States Patent Huang

#### US 9,905,918 B2 (10) Patent No.:

#### (45) Date of Patent: Feb. 27, 2018

#### (54) ELECTRONIC APPARATUS AND LAND GRID ARRAY MODULE

(71) Applicant: Huawei Device Co., Ltd., Shenzhen

(72)Inventor: Benwei Huang, Shenzhen (CN)

Assignee: HUAWEI DEVICE CO., LTD.,

Shenzhen (CN)

Subject to any disclaimer, the term of this (\*) Notice:

patent is extended or adjusted under 35 U.S.C. 154(b) by 468 days.

(21) Appl. No.: 14/580,991

(22) Filed: Dec. 23, 2014

**Prior Publication Data** (65)

> US 2015/0116186 A1 Apr. 30, 2015

#### Related U.S. Application Data

Continuation of application No. PCT/CN2013/089994, filed on Dec. 19, 2013.

#### (30)Foreign Application Priority Data

Dec. 21, 2012 (CN) ...... 2012 1 0562834

Int. Cl. (51)H01Q 1/22 H01Q 1/50

(2006.01)(2006.01)

(Continued)

(52) U.S. Cl.

CPC ..... H01Q 1/50 (2013.01); H01Q 1/22 (2013.01); H05K 1/0243 (2013.01); H05K 1/111 (2013.01);

(Continued)

Field of Classification Search

CPC ....... H05K 1/0243; H05K 1/111; H05K 1/18; H05K 1/141; H05K 2201/094;

(Continued)

#### (56)References Cited

#### U.S. PATENT DOCUMENTS

6,392,605 B2 6,982,879 B1\* 5/2002 Anterow 1/2006 Franca-Neto ...... H01Q 9/0407

(Continued)

#### FOREIGN PATENT DOCUMENTS

CN CN 101394191 A 3/2009 102237342 A 11/2011 (Continued)

#### OTHER PUBLICATIONS

Foreign Communication From a Counterpart Application, Japanese Application No. 2015538280, Japanese Office Action dated Jun. 14, 2016, 4 pages.


(Continued)

Primary Examiner — Dameon E Levi Assistant Examiner — Hasan Islam (74) Attorney, Agent, or Firm - Conley Rose, P.C.

#### ABSTRACT

An electronic apparatus and a land grid array LGA module. The electronic apparatus includes: a first printed circuit board, a lower surface of the first printed circuit board is provided with a first radio frequency pad and a first nonradio frequency pad; a motherboard, including a second printed circuit board, where an upper surface of the second printed circuit board is provided with a second radio frequency pad and a second non-radio frequency pad, the first radio frequency pad is connected to the second radio frequency pad, and the first non-radio frequency pad is connected to the second non-radio frequency pad; an antenna, located on the motherboard and connected to the second radio frequency pad, the first radio frequency pad and the second radio frequency pad are configured to transmit, between the LGA module and the motherboard, a radio frequency signal transmitted by the antenna.

#### 20 Claims, 8 Drawing Sheets





## (12) United States Patent Yanagi et al.

# (54) ANTENNA DEVICE, CIRCUIT BOARD AND

(71) Applicant: FUJITSU COMPONENT LIMITED,

Tokyo (JP)

MEMORY CARD

Inventors: Masahiro Yanagi, Tokyo (JP); Shigemi

Kurashima, Tokyo (JP); Hideaki Yoda,

Tokyo (JP)

Assignee: FUJITSU COMPONENT LIMITED,

Tokyo (JP)

(\*) Notice: Subject to any disclaimer, the term of this

patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: 15/178,731

(22) Filed: Jun. 10, 2016

(65)**Prior Publication Data** 

US 2016/0301137 A1 Oct. 13, 2016

#### Related U.S. Application Data

Division of application No. 13/417,513, filed on Mar. (62)12, 2012, now Pat. No. 9,391,358.

#### (30)Foreign Application Priority Data

Mar. 29, 2011 (JP) ...... 2011-073642

(51) Int. Cl. H01Q 9/04 (2006.01)H01Q 1/24 (2006.01)H01Q 9/42 (2006.01)H01Q 1/48 (2006.01)

(52) U.S. Cl. .... H01Q 9/04 (2013.01); H01Q 1/24 (2013.01); H01Q 1/48 (2013.01); H01Q 9/42

#### US 9,905,927 B2 (10) Patent No.:

(45) Date of Patent: Feb. 27, 2018

(58) Field of Classification Search

CPC ...... H01Q 9/42; H01Q 9/30 See application file for complete search history.

#### (56)References Cited

#### U.S. PATENT DOCUMENTS

3,845,490 A	10/1974	Manwarren et al.
6,404,395 B	6/2002	Masuda
7,023,909 B	4/2006	Adams et al.
7,026,999 B2	2 4/2006	Umehara et al.
7,466,277 B2	2 12/2008	Ishizuka et al.
2001/0043159 A	1 * 11/2001	Masuda H01Q 1/38
		343/700 MS
2002/0034966 A	1 3/2002	Saito et al.
2002/0154063 A	1 10/2002	Klaavo et al.
2004/0196188 A	1 10/2004	Yeh
2004/0246180 A	1 12/2004	Okado
2006/0208949 A	1 9/2006	Hirabayashi
2007/0052591 A	1 3/2007	Chao
2008/0309562 A	1 12/2008	Tsutsumi et al.
2009/0051606 A	1 2/2009	Ochi et al.
2009/0224981 A	1 9/2009	Shibata
	(Con	tinued)

#### FOREIGN PATENT DOCUMENTS


JP	H06-069715	3/1994
JP	2001-266098	9/2001
	(Cor	ntinued)

Primary Examiner — Daniel J Munoz (74) Attorney, Agent, or Firm — IPUSA, PLLC

#### (57)**ABSTRACT**

A disclosed antenna device includes a substrate made of a dielectric material, an antenna element formed on one side of the substrate, and a ground element formed on another side of the substrate.

#### 5 Claims, 28 Drawing Sheets

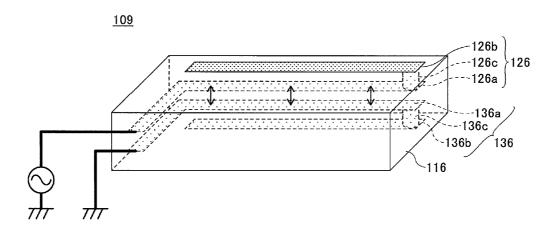



## (12) United States Patent Lepe et al.

#### (54) WIRELESS COMMUNICATION DEVICE AND ANTENNA ASSEMBLY

(71) Applicant: TYCO ELECTRONICS

CORPORATION, Berwyn, PA (US)

(72)Inventors: Hilario Lepe, Gilroy, CA (US); Bruce

Foster Bishop, Aptos, CA (US); Junwon Kim, Capitola, CA (US)

Assignee: TE Connectivity Corporation,

Berwyn, PA (US)

Subject to any disclaimer, the term of this Notice:

patent is extended or adjusted under 35 U.S.C. 154(b) by 118 days.

(21) Appl. No.: 14/921,001

(22)Filed: Oct. 23, 2015

(65)**Prior Publication Data** 

> US 2017/0117611 A1 Apr. 27, 2017

(51) Int. Cl. H01Q 13/12 (2006.01)H01Q 13/18 (2006.01)H01Q 1/24 (2006.01)G06F 1/16 H01Q 13/10 (2006.01)(2006.01)H01Q 1/22 (2006.01)H01Q 21/28 (2006.01)

(52) U.S. Cl.

CPC .... H01Q 1/24 (2013.01); G06F 1/1618 (2013.01); G06F 1/1633 (2013.01); G06F 1/1681 (2013.01); G06F 1/1696 (2013.01); H01Q 1/2266 (2013.01); H01Q 1/241 (2013.01); H01Q 1/243 (2013.01); H01Q 13/10 (2013.01); H01Q 21/28 (2013.01)

#### US 9,912,039 B2 (10) Patent No.:

(45) Date of Patent:

Mar. 6, 2018

#### (58)Field of Classification Search

CPC .......... H01Q 1/24; H01Q 1/241; H01Q 1/243; H01Q 13/10; H01Q 13/12; H01Q 13/18 See application file for complete search history.

#### **References Cited** (56)

#### U.S. PATENT DOCUMENTS

6.429.819	B1	8/2002	Bishop et al.
6,697,022			Ponce De Leon et al.
7,209,084		4/2007	Lindell
8,294,620	B2	10/2012	Flint et al.
8,665,170	B2	3/2014	Bishop et al.
2008/0062058	A1	3/2008	Bishop
2013/0271330	A1	10/2013	Bishop et al.
2014/0240177	A1	8/2014	Wang et al.
2014/0361932	A1*	12/2014	Irci H01Q 1/243
			343/702


<sup>\*</sup> cited by examiner

Primary Examiner - Hoang Nguyen

#### (57)ABSTRACT

Wireless communication device includes a first device section. The first device section has a first edge. The wireless communication device also includes a second device section that has a second edge. The wireless communication device also includes a floating hinge that joins the first and second edges and permits the first and second device sections to move between a closed state and an operating state. The floating hinge and the first device section are rotatable about a first axis of rotation that extends through the floating hinge. The floating hinge and the second device section are rotatable about a second axis of rotation that extends through the floating hinge. The floating hinge includes a slot antenna that is communicatively coupled to a processor and is configured to at least one of transmit wireless signals or receive wireless signals.

#### 20 Claims, 7 Drawing Sheets

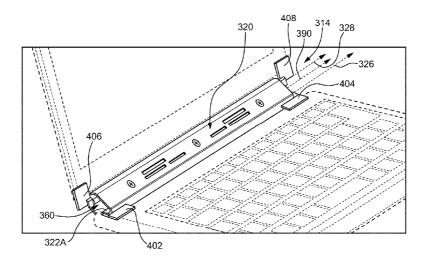



### (12) United States Patent Irci et al.

#### US 9,912,040 B2 (10) Patent No.:

#### (45) Date of Patent: Mar. 6, 2018

#### (54) ELECTRONIC DEVICE ANTENNA CARRIER COUPLED TO PRINTED CIRCUIT AND HOUSING STRUCTURES

(71) Applicant: Apple Inc., Cupertino, CA (US)

(72) Inventors: Erdinc Irci, Sunnyvale, CA (US); Hongfei Hu, Santa Clara, CA (US); Mattia Pascolini, San Francisco, CA (US); Yijun Zhou, Sunnyvale, CA (US)

(73) Assignee: Apple Inc., Cupertino, CA (US)

(\*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 413 days.

Appl. No.: 14/262,486

(22)Filed: Apr. 25, 2014

(65)**Prior Publication Data** 

> US 2015/0311579 A1 Oct. 29, 2015

(51) **Int. Cl.** H01Q 1/24 (2006.01)H01Q 9/42 (2006.01)H01Q 13/10 (2006.01)H01Q 1/22 (2006.01)

(52) U.S. Cl. CPC ...... H01Q 1/243 (2013.01); H01Q 9/42 (2013.01); **H01Q 13/10** (2013.01)

Field of Classification Search

CPC ...... H01Q 1/241-1/243; H01Q 1/2258; H01Q 1/2266; H01Q 9/0421; H01Q 9/30; H05K

USPC ....... 343/702, 906, 700 MS, 878, 706; 361/760, 753, 799

See application file for complete search history.

#### (56)References Cited

#### U.S. PATENT DOCUMENTS

4,672,386 A *	6/1987	Wood H01Q 21/24	
6 330 400 B1*	1/2002	343/770 Flint H01Q 1/22	
, ,		343/702	
6,448,932 B1*	9/2002	Stoiljkovic H01Q 1/243	
		343/700 MS	
(Continued)			

#### OTHER PUBLICATIONS

"2.4 GHz Surface Mount Device (SMD) on-ground Antenna" Molex, [Retrieved on Jun. 18, 2014] Retrieved from the Internet: <a href="http://www.molex.com/link/SMD\_antenna.html">http://www.molex.com/link/SMD\_antenna.html</a>

(Continued)


Primary Examiner — Hoang Nguyen Assistant Examiner - Awat Salih

(74) Attorney, Agent, or Firm — Treyz Law Group, P.C.; G. Victor Treyz; Tianyi He

#### ABSTRACT

Electronic device antenna structures may include first and second antennas. A housing may have a periphery that is surrounded by peripheral conductive structures such as a segmented peripheral metal member. A segment of the peripheral metal member may be separated from a ground by an opening. An antenna feed for the first antenna may have a positive antenna terminal coupled to the peripheral metal member and a ground terminal coupled to the ground. A return path for the first antenna may span the opening in parallel with the antenna feed. A plastic carrier may be mounted to a printed circuit and a metal housing structure using screws. The plastic carrier may support an antenna resonating element for the second antenna and may support the return path for the first antenna. The screws may short metal structures on the plastic carrier to the metal structures and traces on the printed circuit.

#### 11 Claims, 11 Drawing Sheets





#### US009912049B2

# (12) United States Patent Chang et al.

# (54) ANTENNA STRUCTURE AND ELECTRONIC DEVICE HAVING SAME

(71) Applicant: Chiun Mai Communication Systems,

Inc., New Taipei (TW)

(72) Inventors: **Tze-Hsuan Chang**, New Taipei (TW);

Cho-Kang Hsu, New Taipei (TW)

(73) Assignee: Chiun Mai Communication Systems, Inc., New Taipei (TW)

(\*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35

U.S.C. 154(b) by 322 days.

(21) Appl. No.: 14/527,127

(22) Filed: Oct. 29, 2014

(65) Prior Publication Data

US 2016/0111789 A1 Apr. 21, 2016

#### (30) Foreign Application Priority Data

Oct. 15, 2014 (CN) ...... 2014 1 0544108

(51) Int. Cl.

#01Q 1/48 (2006.01)

#01Q 9/04 (2006.01)

#01Q 9/04 (2006.01)

#01Q 5/00 (2015.01)

#01Q 5/371 (2015.01)

(52) **U.S. Cl.** CPC ....

### (10) Patent No.: US 9,912,049 B2

(45) **Date of Patent:** Mar. 6, 2018

### (58) Field of Classification Search

CPC .... H01Q 9/0407; H01Q 5/371; H01Q 9/0442; H01Q 9/42 See application file for complete search history.

see appreciation me for complete search ms

#### (56) References Cited

#### U.S. PATENT DOCUMENTS

6,552,686	B2 *	4/2003	Ollikainen H01Q 1/243
2008/0316115	A1*	12/2008	343/700 MS Hill H01Q 1/243
2012/0139792	A1*	6/2012	343/702 Pan H01Q 1/243
			343/700 MS Jin H01Q 1/243
			343/702 Lin H01Q 1/243
2013/02/1341	AI	10/2013	343/860


#### \* cited by examiner

Primary Examiner — Daniel J Munoz (74) Attorney, Agent, or Firm — ScienBiziP, P.C.

#### (57) ABSTRACT

A dual-band Wi-Fi antenna structure includes a metallic middle frame of a casing of a handheld electronic device, a grounding plane received in the middle frame, an antenna body connected to the grounding plane, and an adjusting element. The grounding plane defines a rectangular recess in a corner thereof. The antenna body has a radiation patch having a part located over the recess. The adjusting element is located in the recess. An effective length of the recess is adjustable by adjusting a parameter of the adjusting element, which is a coefficient of self-inductance when the adjusting element is an adjustable inductor. By adjusting the effective length of the recess, a resonant frequency of the antenna structure at a low frequency band is adjustable, while a resonant frequency thereof at a high frequency band is not altered.

#### 24 Claims, 6 Drawing Sheets





# (12) United States Patent

Noda et al.

#### (54) MULTIBAND ANTENNA AND MANUFACTURING METHOD THEREOF

(71) Applicants: Hiroyuki Noda, Mie (JP); Tomokazu Sonozaki, Mie (JP)

Inventors: Hiroyuki Noda, Mie (JP); Tomokazu Sonozaki, Mie (JP)

Assignee: NTN CORPORATION, Osaka (JP)

Subject to any disclaimer, the term of this (\*) Notice: patent is extended or adjusted under 35

U.S.C. 154(b) by 127 days.

14/384,884 (21) Appl. No.:

(22) PCT Filed: Mar. 14, 2013

(86) PCT No.: PCT/JP2013/057251

§ 371 (c)(1),

Sep. 12, 2014 (2) Date:

(87) PCT Pub. No.: WO2013/137404 PCT Pub. Date: Sep. 19, 2013

(65)**Prior Publication Data** 

> US 2015/0061963 A1 Mar. 5, 2015

(30) Foreign Application Priority Data

Mar. 16, 2012 (JP) ...... 2012-060231

(51) Int. Cl. H01Q 5/00 H01Q 21/28

(2015.01)(2006.01)

(Continued)

(52) U.S. Cl. CPC ...... H01Q 5/0072 (2013.01); B29C 45/1671 (2013.01); **H01Q 5/371** (2015.01); (Continued)

US 9,912,056 B2 (10) Patent No.:

(45) Date of Patent:

Mar. 6, 2018

(58)Field of Classification Search

CPC ....... H01Q 5/0072; H01Q 5/371; H01Q 1/38; H01Q 1/243; H01Q 9/0407; H01Q 21/28 (Continued)

#### (56)References Cited

#### U.S. PATENT DOCUMENTS

5,631,660 A \* 5/1997 Higashiguchi ........... H01Q 1/38 343/700 MS 12/2002 Nagumo et al 6.501.425 B1

(Continued)

#### FOREIGN PATENT DOCUMENTS

EP 1 930 216 6/2008 JP 2002-299936 10/2002 (Continued)

#### OTHER PUBLICATIONS


Chinese Office Action dated Aug. 25, 2015 in corresponding Chinese Patent Application No. 201380013266.3 with English translation

(Continued)

Primary Examiner — Dameon E Levi Assistant Examiner - Ab Salam Alkassim, Jr. (74) Attorney, Agent, or Firm — Wenderoth, Lind & Ponack, L.L.P.

#### (57) ABSTRACT

A multiband antenna includes a first antenna unit (10) and a second antenna unit (20). The first antenna unit (10) includes a first antenna pattern (11) formed of a conductor and a first substrate (12) formed of a dielectric, for holding the first antenna pattern (11). The second antenna unit (20) includes a second antenna pattern (21) formed of a conductor and a second substrate (22) formed of a dielectric having a dielectric constant different from the dielectric constant of the first substrate (12), for holding the second antenna pattern (21). In the multiband antenna, by injection molding the second substrate (22) with the first antenna unit (10) and the second (Continued)





US009912058B2

# (12) United States Patent Palm et al.

# (10) Patent No.: US 9,912,058 B2 (45) Date of Patent: Mar. 6, 2018

#### (54) HYBRID ANTENNA, ANTENNA ARRANGEMENT AND METHOD FOR MANUFACTURING AN ANTENNA ARRANGEMENT

(71) Applicant: **Infineon Technologies AG**, Neubiberg (DE)

(72) Inventors: **Petteri Palm**, Regensburg (DE);

Martin Buchsbaum, Graz (AT); Josef Gruber, St. Ruprecht (AT); Juergen Hoelzl, Graz (AT); Frank Pueschner, Kelheim (DE); Peter Stampka,

Burglengenfeld (DE)

(73) Assignee: Infineon Technologies AG, Neubiberg

(DE)

(\*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35

U.S.C. 154(b) by 425 days.

(21) Appl. No.: 14/519,166

(22) Filed: Oct. 21, 2014

(65) Prior Publication Data

US 2016/0111787 A1 Apr. 21, 2016

(51) Int. Cl. H01Q 7/08 (2006.01) H01Q 1/24 (2006.01) H01Q 21/24 (2006.01)

(52) **U.S. CI.** CPC ...... *H01Q 7/08* (2013.01); *H01Q 1/243* 

#### (56) References Cited

#### U.S. PATENT DOCUMENTS

6,163,305 A *	12/2000	Murakami H01Q 7/08
		343/788
2008/0238799 A1*	10/2008	Tsushima H01Q 1/2216
		343/788
2009/0096694 A1*	4/2009	Ito G06K 19/07749
		343/788
2011/0050531 A1*	3/2011	Yamaguchi H01Q 1/2216
		343/842
2012/0127049 A1*	5/2012	Kato H01P 1/20345
		343/749
2013/0147675 A1*	6/2013	Kato H01Q 1/38
		343/788
2014/0176384 A1*	6/2014	Yosui H01Q 7/06
		343/788
2014/0253404 A1*	9/2014	Ikemoto H01Q 1/40
		343/788
2015/0214622 A1*	7/2015	Tenno H01Q 1/38
		343/702

#### OTHER PUBLICATIONS

AS3922; NFC Tag Front-end with "Active Boost" Technology; www.ams.com/AS3922; pp. 1-56, printed out Oct. 23, 2014.


\* cited by examiner

Primary Examiner — Dameon E Levi Assistant Examiner — David Lotter (74) Attorney, Agent, or Firm — Viering, Jentschura & Partner mbB

#### (57) ABSTRACT

According to one embodiment, a hybrid antenna is described comprising a plurality of windings wherein each winding comprises a loop antenna portion arranged in a plane and a ferrite antenna portion arranged at least partially outside of the plane.

### 23 Claims, 16 Drawing Sheets

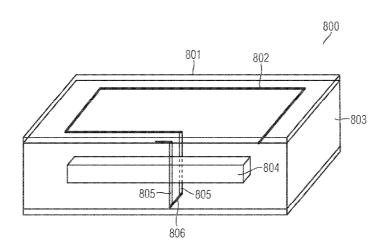



US009912065B2

# (12) United States Patent Kim et al.

# (54) DIPOLE ANTENNA MODULE AND ELECTRONIC APPARATUS INCLUDING

(71) Applicant: Samsung Electronics Co., Ltd,

Suwon-si, Gyeonggi-do (KR)

(72) Inventors: Tae-young Kim, Suwon-si (KR);

Chee-hwan Yang, Yongin-si (KR); In-young Lee, Hwaseong-si (KR); Sang-hoon Choi, Suwon-si (KR)

(73) Assignee: SAMSUNG ELECTRONICS CO.,

LTD., Suwon-si (KR)

(\*) Notice: Subject to any disclaimer, the term of this

patent is extended or adjusted under 35 U.S.C. 154(b) by 143 days.

(21) Appl. No.: 13/928,524

THE SAME

(22) Filed: Jun. 27, 2013

(65) Prior Publication Data

US 2014/0132468 A1 May 15, 2014

Related U.S. Application Data

(60) Provisional application No. 61/726,674, filed on Nov. 15, 2012.

(30) Foreign Application Priority Data

Jan. 8, 2013 (KR) ...... 10-2013-0002155

(51) Int. Cl. *H01Q 9/28 H01Q 9/26* 

(2006.01) (2006.01)

(Continued)

(52) U.S. Cl.

CPC .....

...... *H01Q 9/285* (2013.01); *H01Q 5/371* (2015.01); *H01Q 9/26* (2013.01); *H01Q* 1/2266 (2013.01); *H01Q 1/48* (2013.01)

### (10) Patent No.: US 9,912,065 B2

(45) Date of Patent:

Mar. 6, 2018

(58) Field of Classification Search

CPC ...... H01Q 9/285

(Continued)

(56) References Cited

U.S. PATENT DOCUMENTS

(Continued)

#### FOREIGN PATENT DOCUMENTS

KR	2011-0064848	6/2011
WO	2012-047085	4/2012
WO	2012-071315	5/2012

#### OTHER PUBLICATIONS

Search Report and Written Opinion dated Jan. 21, 2014 issued in International Application No. PCT/KR2013/008789.

Extended European Search Report dated Feb. 20, 2014 issued in EP Application No. 13193070.3.

European Office Action dated Oct. 20, 2017 in corresponding European Patent Application No. 13 193 070.3.


Primary Examiner — Dameon E Levi Assistant Examiner — Walter Davis

(74) Attorney, Agent, or Firm - Staas & Halsey LLP

#### (57) ABSTRACT

A dipole antenna module and an electronic apparatus include an antenna element, a power feeder formed at an end of the antenna element and connected to a circuit board to process an antenna signal through a cable, and a ground part to ground a ground of the cable such that the ground part keeps a preset gap from the antenna element and is grounded to a conductor of the circuit board.

#### 25 Claims, 12 Drawing Sheets

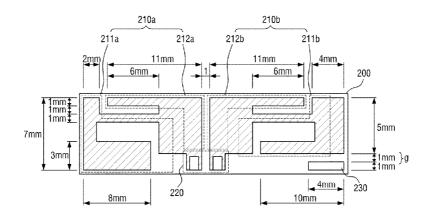



US009912066B2

# (12) United States Patent Tai

# (10) Patent No.: US 9,912,066 B2 (45) Date of Patent: Mar. 6, 2018

#### (54) TUNABLE ANTENNA MODULE USING FREQUENCY-DIVISION CIRCUIT FOR MOBILE DEVICE WITH METAL COVER

- (71) Applicant: **MEDIATEK INC.**, Hsin-Chu (TW)
- (72) Inventor: Chen-Fang Tai, New Taipei (TW)
- (73) Assignee: MEDIATEK INC., Hsin-Chu (TW)
- (\*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 146 days.
- (21) Appl. No.: 14/965,819
- (22) Filed: Dec. 10, 2015
- (65) Prior Publication Data

US 2017/0005413 A1 Jan. 5, 2017

#### Related U.S. Application Data

- (60) Provisional application No. 62/188,130, filed on Jul. 2, 2015.
- (51) Int. Cl.

  #01Q 1/48 (2006.01)

  #01Q 13/10 (2006.01)

  #01Q 1/24 (2006.01)

  #01Q 5/314 (2015.01)
- (58) Field of Classification Search
  CPC ........... H01Q 1/243; H01Q 1/48; H01Q 5/314;
  H01Q 13/10
  See application file for complete search history.

### (56) References Cited

#### U.S. PATENT DOCUMENTS

2013/0016633 A1* 1/2013 I	Lum H04B 1/0057
	370/277
2013/0250819 A1* 9/2013 I	Khlat H04B 1/10
	370/278
2014/0087668 A1* 3/2014 1	Mow H04W 24/00
	455/67.14
2014/0266938 A1* 9/2014 (	Ouyang H01Q 5/321
2014/0200936 AT	343/729
2014/0306857 A1* 10/2014 I	Bevelacqua H01Q 1/243
	343/750

#### FOREIGN PATENT DOCUMENTS

KR 2013-0125578 \* 11/2013 ...... H04B 1/44


\* cited by examiner

Primary Examiner — Hoang Nguyen (74) Attorney, Agent, or Firm — Winston Hsu

#### (57) ABSTRACT

A tunable antenna module for a mobile device includes an antenna, a frequency-division circuit and one or more impedance-tuning circuits. The frequency-division circuit is coupled to a radiator of the antenna for forming one or more signal paths for one or more of component frequencies of a radio-frequency signal of the antenna. One or more the impedance-tuning circuits are coupled to the frequency-division circuit for tuning an impedance of the antenna at one or more of the component frequencies of the radio-frequency signal.

### 18 Claims, 11 Drawing Sheets





### (12) United States Patent Diukman et al.

#### US 9,912,071 B2 (10) Patent No.:

#### (45) Date of Patent: Mar. 6, 2018

#### (54) QUASI-YAGI-TYPE ANTENNA

(71) Applicant: QUALCOMM Incorporated, San

Diego, CA (US)

(72) Inventors: Iddo Diukman, Haifa (IL); Alon

Yehezkely, Haifa (IL)

Assignee: QUALCOMM Incorporated, San

Diego, CA (US)

(\*) Notice: Subject to any disclaimer, the term of this

patent is extended or adjusted under 35 U.S.C. 154(b) by 119 days.

- (21) Appl. No.: 14/561,680
- Dec. 5, 2014 (22) Filed:

#### **Prior Publication Data** (65)

US 2015/0194736 A1 Jul. 9, 2015

### Related U.S. Application Data

- Provisional application No. 61/925,011, filed on Jan. 8, 2014.
- (51) Int. Cl. H01Q 13/18 (2006.01)H01Q 19/30 (2006.01) H01Q 1/50 (2006.01)H01Q 1/48 (2006.01)H01Q 9/20 (2006.01)H01Q 21/00 (2006.01) H01Q 21/06 (2006.01)
- (52) U.S. Cl. H01Q 19/30 (2013.01); H01Q 1/48 CPC (2013.01); H01Q 1/50 (2013.01); H01Q 9/20
  - (2013.01); H01Q 21/0006 (2013.01); H01Q **21/062** (2013.01)

#### Field of Classification Search

CPC ...... H01Q 19/30; H01Q 1/50; H01Q 1/48; H01Q 21/0006; H01Q 21/062 See application file for complete search history.

#### (56)References Cited

#### U.S. PATENT DOCUMENTS

5,274,391	A	12/1993	Connolly	
5,532,708	A *	7/1996	Krenz H01Q 9/40	
			343/795	
6,114,997	A *	9/2000	Lee H01Q 1/38	
			343/700 MS	
6,476,773	B2	11/2002	Palmer et al.	
8,174,336	B2	5/2012	Kim et al.	
8,269,672	B2	9/2012	Tinaphong et al.	
9,570,809	B2	2/2017	Ganchrow et al.	
2008/0158081	A1*	7/2008	Rofougaran H01L 23/66	
			343/787	
2009/0295667	A1	12/2009	Ma et al.	
(Continued)				

#### FOREIGN PATENT DOCUMENTS

DE	2020192 A1	11/1971
EP	2575213 A1	4/2013
GB	765465 A	1/1957

#### OTHER PUBLICATIONS


International Search Report and Written Opinion-PCT/US2014/ 069105—ISA/EPO—Mar. 11, 2015, 11 pages.

Primary Examiner — Dameon E Levi Assistant Examiner - David Lotter (74) Attorney, Agent, or Firm — Qualcomm Incorporated-Toler

#### (57)ABSTRACT

An apparatus includes a first ground plane, a second ground plane, an antenna, and a balun coupled to the antenna. The balun is disposed between the first ground plane and the second ground plane.

### 20 Claims, 6 Drawing Sheets





US009917351B2

# $\underset{Tai}{United \ States \ Patent}$

# (10) Patent No.: US 9,917,351 B2

### (45) **Date of Patent:** Mar. 13, 2018

#### (54) ANTENNA AND ANTENNA ASSEMBLY

(71) Applicant: FOXCONN INTERCONNECT TECHNOLOGY LIMITED, Grand

Cayman (KY)

(72) Inventor: Lung-Sheng Tai, New Taipei (TW)

(73) Assignee: FOXCONN INTERCONNECT TECHNOLOGY Limited, Grand

Cayman (KY)

(\*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35

U.S.C. 154(b) by 7 days.

(21) Appl. No.: 15/095,171

(22) Filed: Apr. 11, 2016

(65) Prior Publication Data

US 2016/0301124 A1 Oct. 13, 2016

(30) Foreign Application Priority Data

Apr. 9, 2015 (TW) ...... 104111356 A

(51) Int. Cl.

#01Q 1/24 (2006.01)

#01Q 13/10 (2006.01)

#01Q 1/22 (2006.01)

#01Q 21/28 (2006.01)

#01Q 5/371 (2015.01)

#01Q 9/04 (2006.01)

(52) **U.S. Cl.** CPC ......

...... H01Q 1/243 (2013.01); H01Q 1/2258 (2013.01); H01Q 5/371 (2015.01); H01Q 13/10 (2013.01); H01Q 13/103 (2013.01); H01Q 21/28 (2013.01); H01Q 9/0407 (2013.01)

#### (58) Field of Classification Search

CPC ...... H01Q 1/2258; H01Q 1/243; H01Q 5/371; H01Q 9/0407; H01Q 13/103; H01Q 21/28

See application file for complete search history.

#### (56) References Cited

### U.S. PATENT DOCUMENTS

2012/0139809 A1*	6/2012	Saito H01Q 1/48
		343/848
2014/0292587 A1*	10/2014	Yarga H01Q 1/243
		343/702
2015/0061941 A1*	3/2015	Hill H01Q 1/38
		343/700 MS
2016/0036129 A1	2/2016	Hwang et al.

#### FOREIGN PATENT DOCUMENTS

JP WO 2013187013 A1 \* 12/2013 ...... H01Q 1/2233


\* cited by examiner

Primary Examiner — Hoang Nguyen (74) Attorney, Agent, or Firm — Wei Te Chung; Ming Chieh Chang

#### (57) ABSTRACT

An antenna comprises a main body and a cable connecting to the main body. The main body has a grounding portion, a cantilevered arm, a first connecting portion and a second connecting portion. The first connecting portion connects the grounding portion and the cantilevered arm. The first connecting portion is located at the upper side of the cantilevered arm and defines a first slot with the cantilevered arm. The second connecting portion connects the grounding portion and the cantilevered arm. The second connecting portion is located at the lower side of the cantilevered arm and defines a second slot with the cantilevered arm.

#### 18 Claims, 6 Drawing Sheets





US009917357B2

# (12) United States Patent Tanaka et al.

# (10) Patent No.: US 9,917,357 B2 (45) Date of Patent: Mar. 13, 2018

### (54) ANTENNA SYSTEM

### (71) Applicant: Sony Corporation, Tokyo (JP)

(72) Inventors: Masato Tanaka, Chiba (JP); Hideaki Shoji, Tokyo (JP); Aiko Yoshida, Tokyo (JP)

(73) Assignees: Sony Corporation, Tokyo (JP); Sony Mobile Communications Inc., Tokyo

(JP)

(\*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 302 days.

(21) Appl. No.: 13/911,765

(22) Filed: Jun. 6, 2013

(65) **Prior Publication Data**US 2014/0361948 A1 Dec. 11, 2014

(51) Int. Cl.

#01Q 1/38 (2006.01)

#01Q 1/24 (2006.01)

#01Q 9/04 (2006.01)

#### (56) References Cited

#### U.S. PATENT DOCUMENTS

5,764,189	A *	6/1998	Lohninger G01S 7/032
			333/246
5,874,926	A *	2/1999	Tsuru et al 343/860
6,469,590	B1 *	10/2002	Lewis et al 333/17.3
7,301,502	B2	11/2007	Sinasi et al.
7,602,341	B2 *	10/2009	Wei-Shan et al 343/700 MS
7,825,863	B2 *	11/2010	Martiskainen et al 343/702
7,932,865	B2	4/2011	Wong et al.
7,990,321	B2	8/2011	Shih
9,007,266	B2 *	4/2015	Hsu et al 343/702
2007/0262906	A1*	11/2007	Haim H01Q 1/2266
			343/700 MS
2011/0298669	A1*	12/2011	Rao H01Q 1/243
			3/13/702

#### \* cited by examiner

Primary Examiner — Graham Smith
Assistant Examiner — Noel Maldonado
(74) Attorney, Agent, or Firm — Oblon, McClelland,
Maier & Neustadt, L.L.P.

#### (57) ABSTRACT

Discussed herein is an antenna system that comprises a feed element and a radiating element that are formed on a dielectric substrate positioned above a circuit board which includes a feed circuit and a ground layer. Specifically, the feed element is disposed within an outer periphery defined by the radiating element. A capacitive coupling is formed between the feed element and the radiating element. With the aforesaid configuration, the antenna system is less affected by the circuit board and interference from other elements that are mounted on the circuit board. Further, manufacturing costs are reduced as compared to the case where the feed element and the radiating element are respectively formed on a front and rear surface of a resin layer.

#### 20 Claims, 11 Drawing Sheets

